




Altro Whiterock Chameleon

Wall cladding



Eau De Chic 6605

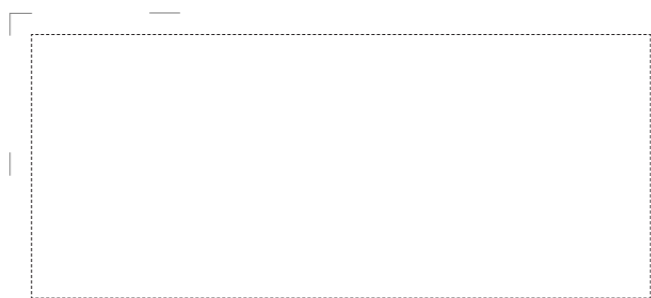

Pure Innocence 6601



Point West 6603



Vino Tinto 6625



Ice Queen 6629



Lounge Lizard 6607



Moulin Rouge 6618



Sheer Glass 6609



Slip Stream 6611



Shocking Pink 6616



Casbah Rock 6608



Night Fall 6622



Feng Shui 6617



Juicy Lucy 6620



Fast Forward 6615



Scorched Earth 6624



Liquorice 6612



Altro Whiterock Chameleon can be joined using the colour co-ordinated 2-part 'H' joint section, the colour co-ordinated hot weld system and the colour co-ordinated FlexiJoint system - contact Altro on 01502 561364 for further details.



altro

CI/SfB reference
(43) T (U47)

June 2008

Altro Whiterock Chameleon™

Wall cladding /

Altro Whiterock Chameleon™ . Wall cladding

Altro Whiterock Chameleon™

Altro Whiterock Chameleon increases your design options with a fresh choice of solid colours all with a high gloss finish. From soothing pastels to bright, vibrant tones, the desired effect is yours to create.

Description

Extruded laminated semi-rigid PVCu sheet.
 Surface finish Gloss
 Thickness 2.5mm
 Size 2500mm x 1220mm
 3000mm x 1220mm
 Weight 3.5kg per m²
 Maximum service temp. 60°C

Typical Applications

Altro Whiterock Chameleon is ideal for areas requiring an attractive, durable, easy to clean and low maintenance finish, which conforms to EU hygiene requirements.
 Typical applications include reception areas, shops, bars and restaurants, showers, changing rooms, pools, spa areas, food serveries and circulation areas.

Fixing

The sheets can be fixed directly to most dry substrates depending on their surface suitability, using one of the following methods:
 1. AltroFix W139 all over adhesive
 2. AltroFix W157 all over adhesive (only suitable for porous surfaces).
 Ensure adequate support is provided to the sheet during all cutting, handling, and installation operations.

Cutting

A fine toothed jigsaw, handsaw or TCT circular saw blade should be used, ensuring adequate support is provided. The sheet should be firmly clamped when cutting with a TCT circular saw.

Jointing

See relevant detailing drawings available from Altro.
 1. A high impact colour co-ordinated extruded PVCu 2-part 'H' joint incorporating a watertight seal at the mouth of the joint, which is unique to Altro.
 2. Silicone joint 3-4mm wide.
 3. Colour co-ordinated welded joint (please refer to Altro for details).
 4. Colour co-ordinated Altro FlexJoint

Internal/External Corners

See relevant detailing drawings available from Altro. Altro Whiterock Chameleon sheets are normally thermoformed on site, so that angles, corners, window and door reveals can be neatly clad eliminating the need for additional jointing in these areas. Colour co-ordinated profiles are also available for the self-installer to cope with these details. Vulnerable external corners are usually over-clad with stainless steel corner protectors, to a height of 1200mm – other sizes are available.

Cleaning

Regular cleaning using a soft cloth and a suitably diluted mild detergent or glass cleaner is all that is normally required. Do not use abrasive pads or wire wool. Do not clean with water temperature above 60°C. Full instructions are available from Altro.

Chemical Resistance

Resistant to a wide range of chemicals, specific details on request.

Fire Resistance

Achieves Class 1 when tested to BS476 Part 7 1987 and Class 0 (BS476 Part 6) when installed on a non-combustible substrate.

Storage & Conditioning (on-site)

Sheets should be stored flat, fully supported and left for 24 hours to attain the ambient room temperature prior to installation (min 14°C).

Limitations of Use

Altro Whiterock Chameleon sheet has a maximum working temperature of 60°C. For temperatures above this, contact Altro Technical Services. Full technical data and detailing diagrams are available from Altro on 01502 561364. Our Technical Services Department is available for advice on 01502 580580. If a layout showing the position of equipment can be supplied, we will advise on the best combination of materials to use.

Installation

Altro Walls has developed a nationwide network of independent local installers who offer a highly competitive fitting service.
 Altro Whiterock Premier Installers are trained by Altro to the highest standards and are fully supported by our Technical Services Division. Should you wish to purchase an Altro Whiterock system to install yourself, we are able to offer technical advice to assist you.

Altro Flooring and Walling Ranges

Products include safety flooring, smooth flooring, resin systems, Mondo rubber, sports flooring, hygienic wall coatings, hygienic PVCu walling and ceiling systems, hygienic doorsets, decorative wall coatings and protective wall coatings. For more information ask for the Altro Flooring and Walling brochures appropriate to your industry sector, or visit www.altro.com

Sample Specification



samples@altro.com

To obtain individual samples; samples with joint strip or thermoformed samples, use the SampleExpress™ service. Please quote the product range and product name/number. Larger samples are also available but may take a few days.

our promise to deliver



the highest quality products & services



Altro Walls (a division of Altro Ltd.), 48 Pinbush Road, South Lowestoft Industrial Estate, Lowestoft, Suffolk, NR33 7NL. Tel: 01502 561364 Fax: 01502 588848 e-mail: walls@altro.com

Altro, Altro Whiterock Chameleon, AltroFix and SampleExpress are Trademarks of Altro Limited.

Also available:

- Safety Flooring
- Resin Systems
- Smooth Flooring
- Rubber Flooring
- Sports Flooring
- Ceiling Systems
- Wall Coatings
- Hygienic Doorsets

